

StaleyNET: Text-Conditioned Music Generation Trained from Scratch on Edge GPUs in Rust

Arpan Pathak

***Abstract*—StaleyNET generates music, including singing, from a short text description and, optionally, lyrics. We treat generation as probabilistic modeling. A recording is converted into a sequence of discrete audio tokens; the probability of that sequence given the text is factorized by the chain rule into a product of next-token predictions; and a decoder-only Transformer learns these conditional distributions by maximum likelihood. Its autoregressive structure is used twice: in training, a causal mask lets every factor of a sequence be evaluated in one pass, and in generation, the same factors are sampled one step at a time. Every stage is our own and written in Rust, including the spectrogram, the tokenizer, the hand-derived gradients and the GPU kernels, and the models are trained from random initialization on two NVIDIA Jetson devices with about 23 hours of Creative Commons music. Because the factorization separates the audio representation from the model of it, the error of the whole system can be decomposed stage by stage. This decomposition locates the main limitation in the tokenizer rather than in the language model: a model trained on a single excerpt reproduces its tokens exactly, while the tokens alone lose much of the spectral detail. A tokenizer that quantizes groups of frequency bands with more codes per step halves the reconstruction error, and joining four frames into each step extends the music a model hears at once from 10.9 to 43.7 seconds at the same cost. We also describe a paired test of whether a model uses its lyrics, which our lyrics-conditioned models, including one trained on 949 hours of rock, do not yet pass. Every algorithm is presented with a worked example.**

I. Introduction

Text-to-music generation has advanced quickly [1], [2]. Most current systems assemble large components trained separately: a neural codec compresses audio into discrete *tokens*, small integers that each stand for a short stretch of sound; a text encoder turns the prompt into vectors; and a Transformer learns to predict the tokens from the text. Such a division of labor performs well, yet it obscures which component is responsible for a given quality, or a given flaw, in what one hears.

StaleyNET approaches the problem from the other end (Figure 1). Rather than borrowing pretrained parts, it builds every stage itself: it computes its own spectrograms, learns its own tokenizer, trains its own Transformer and reconstructs its own waveforms. Everything is written in Rust, including the GPU kernels, which cuda-oxide [3] compiles from Rust. Training ran on two embedded computers designed for robotics: an NVIDIA Jetson Orin NX with 16 GB of memory and an NVIDIA Jetson AGX Thor with 128 GB.

A single probabilistic model organizes the whole system. Music is represented as a sequence of tokens, and its probability given the text is factorized by the chain rule into a product of next-token predictions (Section V-A). One autoregressive Transformer learns all of these predictions at once, and generation samples them one after another. Because this factorization separates the audio representation from the model of it, each stage can be measured on its own, and much of this paper reports what those measurements revealed.

Our first models learned text-conditioned structure well above chance, yet their voices sounded blurred. Two experiments located the cause. Passed through the tokenizer and the vocoder alone, with no model involved, held-out recordings had already lost most of their spectral detail; trained on a single excerpt, the model reproduced it token for token. The tokenizer, not the language model, was the main limitation, and a revised tokenizer that quantizes groups of frequency bands separately halved the reconstruction error.

This paper makes four contributions.

- A complete text-to-music system written in Rust, GPU kernels included, and trained from scratch on embedded GPUs.
- Every algorithm stated as numbered pseudocode with a worked example and, where an algorithm is easy to get wrong, a proof of its correctness.
- A position map that adds a lyrics input to a trained model without discarding what it has learned, and a paired test of whether that input is used.
- A stage-by-stage error analysis that separates the tokenizer, the vocoder and the language model, and a tokenizer study guided by it.

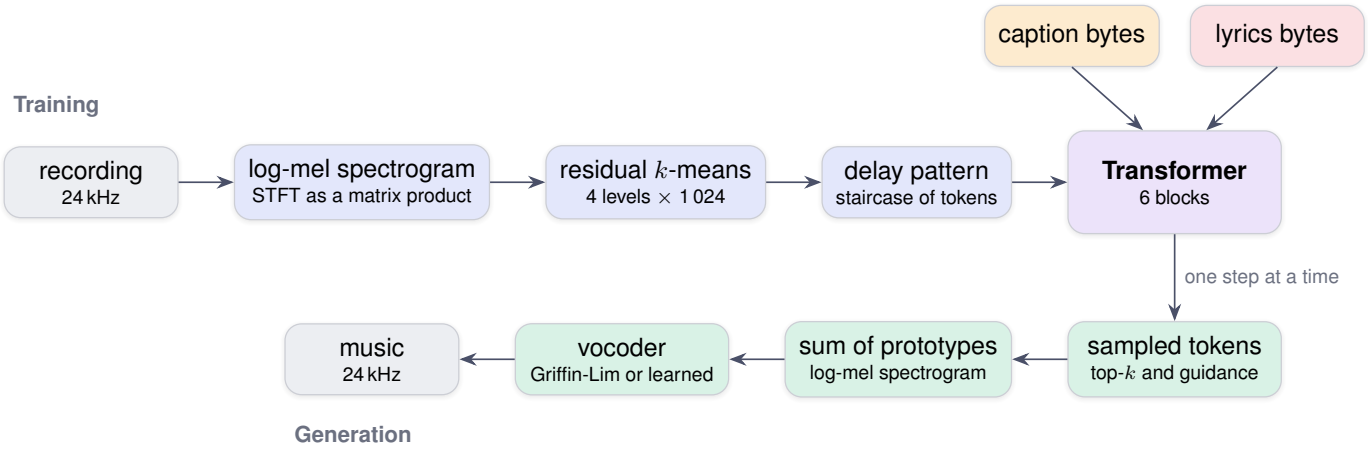


Fig. 1. An overview of StaleyNET. During training (top row), a recording is converted into a staircase of discrete tokens, which the Transformer learns to predict from the caption and the lyrics. During generation (bottom row), the Transformer produces tokens one step at a time, and the tokens are turned back into sound.

a) Conventions.: Algorithms follow the style of Cormen et al. [4], as in our tutorial on tiled matrix multiplication [5]: each procedure states its inputs and its output in words, with units, and the text refers to its numbered lines. $[a, b)$ denotes the integers $a, \ldots, b-1$, and indices start at 0. Each symbol is defined where it first appears, and Table I collects those used in more than one section. A few letters take a different meaning inside a single subsection, such as K for the keys of attention, and the text points this out.

Two units recur. Frequencies and sample rates are measured in hertz (Hz): a 440 Hz tone vibrates 440 times per second, and audio sampled at 24 kHz is stored as 24 000 numbers per second. Losses are measured in *nats*, the unit of information based on the natural logarithm: a prediction that assigns probability q to the correct answer costs $-\ln q$ nats, so a certain prediction costs nothing and a uniform guess among 1 024 tokens costs $\ln 1024 \approx 6.93$.

TABLE I
SYMBOLS USED IN MORE THAN ONE SECTION.

symbol	meaning	value
f_s	sample rate of the analyzed audio (samples per second)	24 000 Hz
N	samples in one spectrogram frame	1 024 (42.7 ms)
H	hop: samples between the starts of two frames	256 (10.7 ms)
S	log-mel spectrogram, one row per frame, one column per mel band	$\cdot \times 128$
step	the frames described by one set of codes	1 or 2 frames
C	codes per step, one from each codebook	4 or 16
K	prototypes per codebook (a codebook is a learned list of typical steps)	1 024
G	groups of mel bands quantized separately	1 or 4
d	width of the vectors inside the model	256 or 512
L	bytes reserved for lyrics	256
θ	all trainable parameters of the model	7.1 M or 42.9 M

II. Related work

AudioLM [6] showed that audio can be generated by a language model over discrete tokens. MusicLM [1] conditioned this approach on text, and MusicGen [2] simplified it to a single Transformer over the codebooks of a neural codec, interleaved by a delay pattern. We follow MusicGen in using the delay pattern, top-k sampling [7] and classifier-free guidance [8], and we replace its pretrained components with k-means quantization of log-mel frames and with raw text bytes, as studied for text by ByT5 [9].

Jukebox [10] generated singing from lyrics and learned the correspondence between words and sound from 1.2 million songs. Singing synthesis systems such as DiffSinger [11] instead work from a musical score with phoneme durations. Our lyrics experiments rely on the line-level timings of the JamendoLyrics benchmark [12], [13]. Neural codecs [14], [15], [16] and neural vocoders [17], [18] achieve far higher fidelity than k-means tokens and the Griffin-Lim algorithm [19], [20]. A codec costs more training than our setting allows; Section IX-A measures what our simpler tokens cost, and Section III-E adapts Vocos to replace Griffin-Lim.

III. From sound to spectrogram and back

A model that generates music needs some description of sound, and the most direct one, the waveform, is a poor choice. It lists the displacement of the loudspeaker 24 000 times per second, and much of that detail is the exact *phase* of each vibration, where in its cycle it happens to be, which the ear barely notices. A model trained on waveforms would spend most of its capacity on information that listeners do not hear. StaleyNET instead describes sound by its *log-mel spectrogram*: a picture of how much energy each frequency band holds in each short moment of time. This section follows a recording on its way to such a picture, and a generated picture on its way back to sound.

A. From a recording to a clean signal

Training recordings arrive as MP3, FLAC, AAC, Ogg Vorbis or WAV files, at various sample rates and often in stereo. Each file is decoded into a list of *samples*, numbers between -1 and 1 that give the loudspeaker's displacement at successive instants, and stereo channels are averaged into one. The *sample rate*, the number of samples per second, is then unified at 24 kHz, so that a second of music always yields the same number of analysis frames. Last, every recording is scaled to the same average loudness (a root-mean-square level of -20 dBFS); otherwise the model would have to learn the large differences in level between commercial and amateur recordings as if they were part of the music.

Changing the sample rate is a filtering problem. A waveform sampled f times per second can represent only frequencies below $f/2$, its *Nyquist frequency*, because at least two samples per cycle are needed to distinguish a vibration from silence. Lowering the rate to 24 kHz therefore requires first removing everything above 12 kHz; otherwise that content folds back into the audible range as false tones, an effect called *aliasing*.

Definition III.1 (Bandlimited resampling)**.** Let x_m be sample m of a recording made at f_{in} samples per second, and let f_{out} be the desired rate, also in samples per second. Output sample n describes the instant n/f_{out} seconds, which lies

$$t_n = n\,\frac{f_{\text{in}}}{f_{\text{out}}}$$

input samples after the start; t_n is usually not a whole number. The resampled signal is

$$y_n \;=\; \sum_m x_m\, h(t_n - m)\,,$$

where the *filter* h gives the weight of an input sample as a function of its distance $t_n - m$ from t_n, measured in input samples. Each output sample is therefore a weighted sum of the input samples near t_n.

Ideal weights come from $\operatorname{sinc}(u) = \sin(\pi u)/(\pi u)$, which interpolates a bandlimited signal exactly but extends infinitely far in both directions [21]. In practice it is cut short smoothly:

$$h(t) = c\,\operatorname{sinc}(ct)\,w(ct/Z).$$

Three parameters shape this filter. The *cutoff* $c \in (0, 1]$ is the highest frequency kept, as a fraction of the input Nyquist frequency; when the rate is lowered, it lies just below $f_{\text{out}}/f_{\text{in}}$. $Z = 24$ is the number of zero crossings of the sinc kept on each side, which sets how many input samples feed each output sample. And w is a Kaiser window, a bell-shaped taper that reaches zero at ± 1 so that truncating the sinc causes no ripples; its shape parameter $\beta = 8.6$ trades a sharper cutoff against stronger suppression of the removed frequencies. Evaluating h afresh for every output sample would be slow, but the fractional part of t_n takes only a few distinct values.

a) A worked example.: Converting from $f_{\text{in}} = 44\,100$ Hz (the rate of a CD) to $f_{\text{out}} = 24\,000$ Hz, the two rates share the greatest common divisor 300, so $t_n = n \cdot 44\,100/24\,000 = 147n/80$ input samples. For $n = 1$, $t_1 = 1 + 67/80$: the second output sample lies $67/80$ of the way from input sample 1 to input sample 2. Every t_n has a fractional part $p/80$ with $p \in [0, 80)$, so exactly 80 sets of filter weights suffice. These sets are the *phases* of a polyphase filter, and each is computed once.

RESAMPLE$(x, f_{\text{in}}, f_{\text{out}})$

Input: the samples $x_0, x_1, \ldots$ of a recording (numbers between -1 and 1), the rate f_{in} at which they were recorded, and the desired rate f_{out}; both rates are whole numbers of samples per second (Hz).
Output: the samples $y_0, y_1, \ldots$ of the same sound at f_{out} samples per second; one second of input gives f_{out} output samples.

```
1   g = gcd(f_in, f_out)
2   L = f_out / g   // number of phases
3   M = f_in / g   // input step per output sample, in L-ths
4   c = 0.97 · min(1, f_out / f_in)   // cutoff
5   R = ⌈Z / c⌉   // filter half-width
6   for p ∈ [0, L) {
7       for j ∈ [−R, R] {
8           h_p[j] = c sinc(c (j − p/L)) w(c (j − p/L) / Z)
9       }
10  }
11  for each output index n {
12      m = ⌊nM / L⌋   // whole part of t_n
13      p = nM mod L   // fraction of t_n
14      y_n = Σ_{j∈[−R,R]} h_p[j] x_{m+j}
15  }
```

Lines 1–5 fix the geometry of the filter: L is the number of phases, $M/L = f_{\text{in}}/f_{\text{out}}$ is the distance between consecutive output samples in input samples, and R is how many input samples are used on each side of t_n, which grows as c shrinks because a lower cutoff needs a wider filter. Lines 6–10 compute each phase once, a list of $2R + 1$ weights, after which line 14 costs one short dot product per output sample. Setting the cutoff at 97 % of the new Nyquist frequency (line 4) leaves the filter a narrow band in which to fall from full strength to zero before aliasing could begin. A test confirms the result: converting 48 kHz audio to 24 kHz attenuates a 15 kHz tone, which the new rate cannot represent, by more than 80 dB, a factor of 10^8 in power.

B. Measuring energy over time and frequency

A spectrogram cuts the signal into short, overlapping *frames* and measures the strength of each frequency within each frame. Four choices fix how fine the resulting picture is (Table II).

Speech systems usually use 80 to 100 bands; music, with harmonic detail across a wider range, benefits from 128. One second of audio becomes a grid of about 94 frames by 128 bands, a far more compact description than 24 000 samples.

C. The spectrogram as a matrix product

Frequencies are usually measured with the fast Fourier transform (FFT). A Fourier transform can also be written as

TABLE II
ANALYSIS SETTINGS AND WHAT EACH ONE MEANS.

setting	value	meaning
frame length	$N = 1\,024$ samples (42.7 ms), Hann window	long enough to separate frequencies 23.4 Hz apart; the window fades each frame in and out so its edges create no spurious frequencies
hop	$H = 256$ samples (10.7 ms)	93.75 frames per second, each overlapping the next by three quarters
frequency bands	128 mel bands, 0 to 12 kHz	narrow at low frequencies and wide at high ones, matching the ear's resolution [22]
compression	natural logarithm, floor 10^{-5}	loudness is perceived roughly logarithmically; the floor keeps silence finite

an ordinary matrix product: each frequency is a fixed pattern of sines and cosines, and multiplying a frame by the matrix that holds these patterns measures how strongly each one is present. Written this way, analyzing a whole recording is one large matrix product, and pooling frequencies into mel bands is a second (Figure 2). StaleyNET computes its spectrograms this way, so that they run on the same GPU kernel as the Transformer and inherit its tests (Section VIII).

Definition III.2 (Log-mel spectrogram)**.** Let F be the matrix whose row f holds the N samples of frame f, and let W be the $N \times (N/2+1)$ matrix with entries $W_{nk} = w[n]\, e^{-2\pi i k n/N}$, where $n \in [0, N)$ indexes the samples of a frame, $k \in [0, N/2]$ indexes the frequencies, $w[n] = \sin^2(\pi n/N)$ is the Hann window and $i = \sqrt{-1}$. The log-mel spectrogram is

$$S \;=\; \ln \max\bigl(|FW|^2 B,\; 10^{-5}\bigr),$$

where the absolute value and the square are taken entry by entry, and B is the $(N/2+1) \times 128$ matrix whose columns are 128 triangular mel filters [22]. S has one row per frame and one column per mel band, and its entries are natural logarithms of energy.

Column k of W holds a windowed cosine (real part) and sine (imaginary part) at frequency $k f_s/N = k \cdot 23.4$ Hz, so entry (f, k) of FW measures how much of that frequency frame f contains, and $|FW|^2$ is its energy. The mel filters then pool the 513 frequencies into 128 bands. Like pitch perception, the *mel* scale is linear below 1 kHz and logarithmic above: centers of neighboring bands lie about 26 Hz apart at low frequencies and about 330 Hz apart near 12 kHz, much as the ear tells low notes apart more finely than high ones.

This formulation costs about $N/\log_2 N \approx 100$ times the arithmetic of an FFT, because a matrix product computes every frequency separately while the FFT shares work between them. Even so, on the Orin NX it analyzes 60 s of audio in 47 ms, against 73 ms for a multithreaded CPU FFT (Table XIV), and the two agree to within 10^{-2} log units in every audible band.

D. Turning a spectrogram back into sound

After generation, a spectrogram must become a waveform again, and this direction is harder: a spectrogram records how strong each frequency is but not its phase. The phase has to be estimated, and not every combination of magnitudes and phases belongs to a real waveform, because neighboring frames overlap by three quarters and must agree about the samples they share. The Griffin-Lim algorithm [19] searches for a phase by alternating between two requirements: the magnitudes should match the target, and the spectrogram should be that of an actual waveform (it should be *consistent*).

GRIFFIN-LIM($|S|, T$)

Input: the target magnitudes $|S|$, a matrix of non-negative numbers with one row per frame and one column for each of the $N/2+1 = 513$ frequencies, and the number of rounds T.
Output: a waveform x at f_s samples per second whose spectrogram approximates $|S|$.

```
1   X = |S| · e^{iφ} with random phases φ
2   x = ISTFT(X)
3   P_prev = STFT(x)
4   for t ∈ [0, T) {
5       P = STFT(x)  // nearest consistent spectrogram
6       A = P + α (P − P_prev)  // momentum
7       X = |S| · A/|A|  // keep the phase, restore the magnitude
8       P_prev = P
9       x = ISTFT(X)
10  }
11  return x
```

STFT (the short-time Fourier transform) turns a waveform into its complex spectrogram, FW above, and ISTFT turns a complex spectrogram back into a waveform by overlapping and adding its frames. Every entry of a complex spectrogram is a magnitude times $e^{i\phi}$, with ϕ the phase in radians. Line 1 pairs the target magnitudes with random phases. Line 5 replaces the estimate by the spectrogram P of a real waveform, and line 7 keeps the phase of each entry while restoring its target magnitude. Line 6 is the acceleration of Perraudin et al. [20], which extrapolates along the last change with momentum $\alpha = 0.99$; in the first round it has no effect, because $P = P_{\text{prev}}$. We use $T = 64$ rounds. Since S holds logarithms of mel energies, the target magnitudes come from undoing its definition step by step: e^S gives the band energies, a regularized least-squares inverse of B spreads them back over the 513 frequencies, and a square root turns energy into magnitude.

a) Limits of Griffin-Lim.: The algorithm needs no training, and it recovers the magnitudes well, but its phase remains an estimate, and that is audible. A sustained harmonic, a sung vowel for example, needs a phase that advances smoothly from frame to frame at the harmonic's own frequency. Griffin-Lim only makes neighboring frames agree, so its phases drift and partly cancel where frames overlap, which a listener hears as a metallic, phasey smear. The smear is worst on voices, whose pitch and vowel identity live in exactly these harmonics,

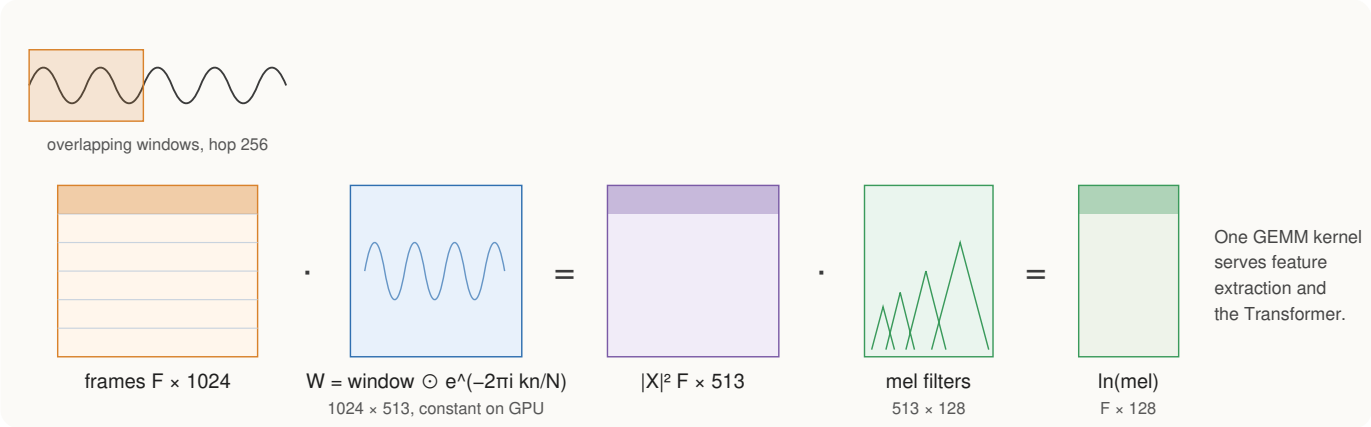


Fig. 2. The spectrogram computed as two matrix products. The frames of the signal, one per row, are multiplied by the windowed Fourier matrix W, which gives the energy $|X|^2$ at each of 513 frequencies; a second product with the mel filters pools these into 128 bands, and the logarithm compresses them. The same matrix-product kernel serves the spectrogram and the Transformer.

and on sharp onsets, which spread into a faint pre-echo. Even on a perfect spectrogram the method adds a spectral error of 0.19 log units per band (Table VI), and the artifacts it causes are larger than that number suggests, because a spectral error measures magnitudes only. A neural vocoder, which learns phase from real recordings [17], [18], avoids these artifacts; Section III-E describes ours.

E. A learned vocoder

Our vocoder follows Vocos [18]. Many neural vocoders generate the waveform sample by sample, or upsample it through a stack of transposed convolutions; Vocos instead stays at the frame rate, predicts the magnitude and the phase of every frequency of every frame, and leaves the step to 24 000 samples per second to an inverse STFT (Figure 3). The network therefore runs on 94 frames per second instead of 24 000 samples, and the inverse transform is the same pair of matrix products as the analysis, read in the other direction.

a) Input.: The input is a log-mel spectrogram S with F frames (rows) and $M = 128$ bands (columns), decoded from tokens. Each band is first standardized with the tokenizer's statistics, $\hat{S}_{f,m} = (S_{f,m} - \mu_m)/\sigma_m$, where μ_m and σ_m are the mean and standard deviation of band m over the training recordings, so that every band enters the network on a similar scale.

b) Network.: A convolution over time with $K = 7$ taps maps the M values of each frame and of its three neighbors on either side to a vector of $D = 512$ numbers. We compute it as one matrix product, after copying each frame's neighborhood into a row of KM numbers. A stack of $L = 8$ ConvNeXt blocks [23] follows. With h the $F \times D$ matrix of frame vectors entering a block, the block computes

$$h \leftarrow h + \gamma \odot \big(\mathrm{GELU}(\mathrm{Norm}(\mathrm{DW}(h))\, W_1 + b_1)\, W_2 + b_2\big),$$

where DW filters each of the D channels over time with its own K taps (a *depthwise* convolution, which mixes neighboring frames but not channels), Norm is RMS normalization [24], W_1 is $D \times 3D$ and W_2 is $3D \times D$, so that the feed-forward part mixes channels within a frame, b_1 and b_2 are biases, and γ is a vector of D per-channel scales, initialized to $1/L$ so that each block starts as a small correction to its input. A final normalization and a linear map, $D \times 2(N/2+1)$, give each frame a log-magnitude $a_{f,k}$ and a phase $\phi_{f,k}$ (in radians) for each of the 513 frequencies k. The complex spectrum is

$$X_{f,k} = e^{\min(a_{f,k},\, a_{\max})}\,(\cos\phi_{f,k} + i \sin\phi_{f,k}),$$

with $a_{\max} = 4.6$, so that no magnitude exceeds $e^{4.6} \approx 100$ and an untrained network cannot overflow. The network has 13.6 million parameters.

c) Inverse STFT.: Frame f becomes N samples through the inverse Fourier transform of a real signal,

$$y_f[n] = \frac{w[n]}{N} \sum_{k=0}^{N/2} c_k \big(\mathrm{Re}\, X_{f,k} \cos\tfrac{2\pi kn}{N} - \mathrm{Im}\, X_{f,k} \sin\tfrac{2\pi kn}{N}\big),$$

where $n \in [0, N)$ is the sample within the frame, w is the Hann window, and $c_k = 1$ for $k = 0$ and $k = N/2$ and 2 otherwise, since every other frequency stands for itself and its mirror image. For all frames at once this is two matrix products, $(F \times 513) \cdot (513 \times N)$, with the cosines and sines, the window and c_k/N folded into constant matrices. Overlap-add then places frame f at samples fH to $fH + N - 1$ and divides each sample by the sum of squared window values that cover it, which makes analysis followed by synthesis return the original signal [19].

d) Loss.: The vocoder is trained to make its waveform $\hat{x}$ sound like the recording x that the spectrogram came from, measured in the frequency domain at several resolutions, as in Parallel WaveGAN [25]. For a resolution with frame length N_r and hop H_r, let $E_r(x)$ be the matrix of energies of x: the squared magnitudes of its STFT, pooled into mel bands for one of the resolutions. The loss is

$$\mathcal{L} = \sum_r \lambda_r \,\mathrm{mean}\big|\ln\max(E_r(\hat{x}), \varepsilon) - \ln\max(E_r(x), \varepsilon)\big|,$$

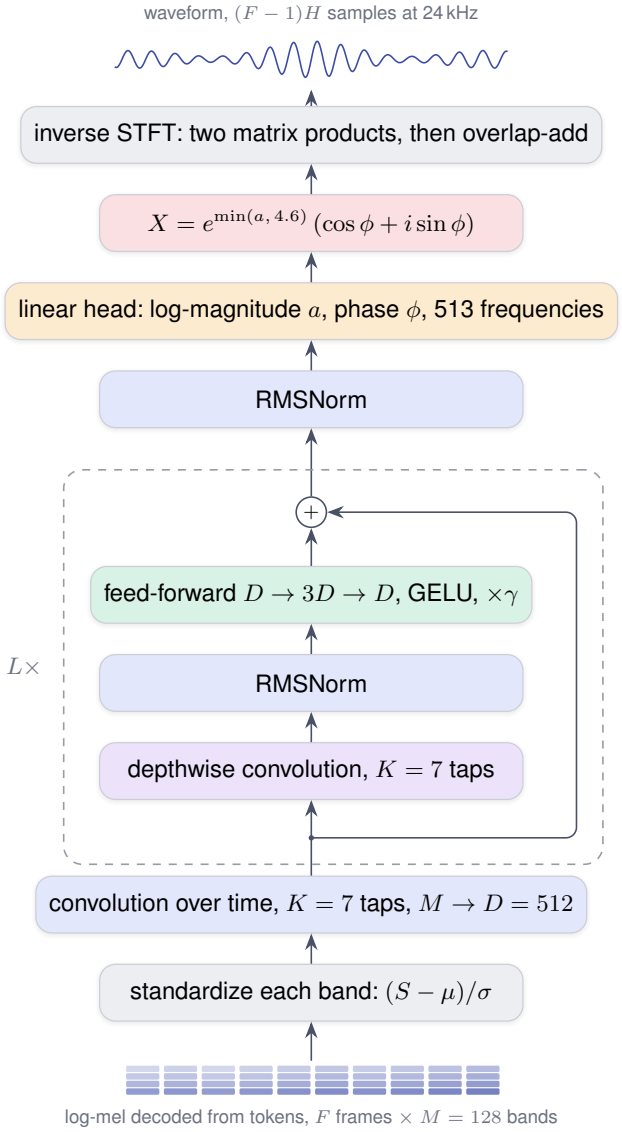


Fig. 3. The learned vocoder. A convolution lifts each frame's mel bands to D numbers, L ConvNeXt blocks mix neighboring frames, and a head predicts the log-magnitude and phase of every frequency. The inverse STFT turns that spectrum into samples with two matrix products and overlap-add.

where the mean runs over all frames and frequencies (or bands), $\varepsilon = 10^{-5}$ is the floor of Table II, and the three resolutions are log-mel energies at $(N_r, H_r) = (1024, 256)$ with weight $\lambda_r = 1$, and log energies at $(512, 128)$ and $(2048, 256)$ with weight 0.5 each. The short frames reward sharp timing, the long ones fine frequency, and the mel term weighs errors roughly as the ear does [17]. Vocos also trains against learned discriminators; we begin with these spectral terms alone, which are differentiable in closed form and stable.

e) Gradients.: As for the language model, every gradient is written by hand. One observation saves most of the work: cutting a signal into overlapping frames and overlap-adding frames into a signal are adjoint linear maps, so the gradient of each is the other. A single pair of kernels therefore serves the inverse STFT, its gradient, the framing inside every loss and that framing's gradient. The gradient of the absolute value is the sign of its argument, and the gradient of $e^a(\cos\phi + i\sin\phi)$ with respect to a and ϕ follows from the chain rule. A test perturbs parameters of every kind, one at a time, and compares the change of the loss with the computed gradient; the two agree to within 5%.

f) Training data.: The vocoder only ever sees spectrograms decoded from tokens, so it is trained on exactly those. The data are 32 882 clips of 30 s (273 hours) of rock and its subgenres from the Free Music Archive [26], tokenized with the tokenizer of Section IV. For every clip we store its samples, resampled and level-normalized as for analysis. A training example is a window of $T = 64$ consecutive frames decoded from the recording's tokens, together with the $(T-1)H + N = 17\,152$ samples (0.71 s) that those frames cover, since frame f is centered on sample fH. The vocoder thus learns the phase and also part of the detail that the tokens lose. A batch holds 16 windows from random recordings. Training uses AdamW [27] with $\beta_1 = 0.8$, $\beta_2 = 0.9$, weight decay 0.01 and gradients clipped to norm 1; the learning rate rises linearly to $5 \cdot 10^{-4}$ over 1 000 steps and then follows a cosine down to $5 \cdot 10^{-5}$ at 200 000 steps.

IV. From Spectrogram to Tokens

A language model predicts the next item of a sequence by choosing from a fixed list of possibilities, its *vocabulary*, just as a text model chooses the next word. A spectrogram, however, consists of real numbers that can take infinitely many values. Before a language model can learn from audio, each moment of the spectrogram must be replaced by choices from a finite list. This replacement is *tokenization*, and its result is a sequence of *tokens*, small integers that each stand for a piece of sound. Large systems use a pretrained neural codec for this purpose [14], [15], [16]. StaleyNET builds its own tokenizer, simple enough to train in minutes: k-means clustering applied in several rounds, known as residual vector quantization.

a) What is tokenized.: Every band of the spectrogram is first standardized: its mean over the training set is subtracted and the result is divided by its standard deviation, so that quiet and loud bands weigh alike and every value is a plain number without unit. Consecutive frames are then grouped into *steps*, the unit that receives tokens. In our first tokenizer a step joins 2 frames, a vector of $D = 2 \cdot 128 = 256$ numbers covering $2H/f_s = 21.3$ ms of sound; a two-minute song becomes about 5 600 steps.

A. Residual quantization

Suppose a collection of $K = 1\,024$ typical steps has been found. We call them *prototypes*, and the list that holds them a *codebook*. Any new step can then be described by naming the prototype that most resembles it: 256 real numbers become one integer between 0 and 1 023, the step's *code*. Lloyd's k-means algorithm [28] finds such prototypes, by alternately assigning every training step to its nearest prototype and moving each prototype to the average of its steps.

One codebook captures only the broad shape of a step. The difference between the step and its prototype, the *residual*, still holds useful detail, so residual quantization repeats the procedure on it: a second codebook is trained on the errors left by the first, a third on those left by the second, and so on. The idea resembles describing a color by its family, then its shade within the family, then finer and finer corrections. Each round, or *level*, contributes one code, so a step is described by one code per level, ordered from coarse to fine (Figure 4).

Definition IV.1 (Residual vector quantization)**.** Let $E_0, \dots, E_{C-1}$ be C codebooks (one per level ℓ), each a list of K prototype vectors of length D, and write $E_\ell[k]$ for prototype k of codebook ℓ. A step $x \in \mathbb{R}^D$ is encoded as the codes $c_0, \dots, c_{C-1}$ defined by

$$r_0 = x, \qquad c_\ell = \operatorname*{arg\,min}_{k \in [0,K)} \|r_\ell - E_\ell[k]\|^2,$$
$$r_{\ell+1} = r_\ell - E_\ell[c_\ell],$$

and it is decoded as $\hat{x} = \sum_\ell E_\ell[c_\ell]$. The vector r_ℓ is the *residual*: the part of x that levels $0, \dots, \ell-1$ have not yet described.

a) A worked example.: In two dimensions, consider the codebooks

$$E_0 = \{(0,0),\ (4,0),\ (0,4),\ (4,4)\},$$
$$E_1 = \{(0.8,0.8),\ (-0.8,0.8),\ (-0.8,-0.8),\ (0.8,-0.8)\},$$

and the point $x = (3,1)$ (Figure 5). Its squared distances to the prototypes of E_0 are $10, 2, 18, 10$, so level 0 picks $c_0 = 1$, the prototype $(4,0)$, and leaves the residual $r_1 = (-1,1)$. Of the corrections in E_1, $(-0.8,0.8)$ lies closest to that residual, so $c_1 = 1$ and only $r_2 = (-0.2,0.2)$ remains. Two small integers now describe the point, and its error falls from $\sqrt{2} \approx 1.41$ after one level to $\sqrt{0.08} \approx 0.28$ after two.

B. Training the codebooks

Codebooks are trained level by level. Each level runs Lloyd's algorithm on what the levels before it left unexplained, then hands its own residuals to the next.

TRAIN-CODEBOOKS(X, C, K, I)

Input: a matrix X with one row per training step and D standardized values per row, the number of levels C, the number of prototypes per level K, and the number of refinement rounds I.
Output: the codebooks $E_0, \dots, E_{C-1}$, each a $K \times D$ matrix whose rows are prototypes.

```
1   R = X // what remains to be described
2   for ℓ ∈ [0, C) {
3     E_ℓ = K rows of R, chosen at random
4     repeat I times {
5       a_i = NEAREST(R_i, E_ℓ) for each row i
6       E_ℓ[k] = mean{R_i : a_i = k} for each k
7       if no row has a_i = k
8         E_ℓ[k] = a random row of R
9       }
10      R_i = R_i − E_ℓ[NEAREST(R_i, E_ℓ)] for each row i
11    }
```

NEAREST(r, E) returns the index of the prototype in E closest to r in Euclidean distance. R holds the residuals of all training steps, one row per step, and $a_i \in [0, K)$ records which prototype row i is currently assigned to. Lines 5–6 are the two moves of Lloyd's algorithm [28]: each row is assigned to its nearest prototype, and each prototype then moves to the mean of its rows. Lines 7–8 restart a prototype to which no row was assigned, so that none of the K entries goes unused, and line 10 passes the residuals on to the next level. We use $I = 20$ rounds on 200 000 steps drawn from the training set.

C. The nearest prototype as a matrix product

Finding the nearest prototype for every step is the most expensive part of both training and encoding. The following identity turns it into a matrix product, which the GPU computes efficiently.

Lemma IV.1. *For a vector x and prototypes $e_0, \dots, e_{K-1}$, all of length D,* $\arg\min_k \|x - e_k\|^2 = \arg\min_k \left(\|e_k\|^2 - 2\,x \cdot e_k\right)$.

Proof. Expanding gives $\|x - e_k\|^2 = \|x\|^2 - 2\,x \cdot e_k + \|e_k\|^2$, and the first term does not depend on k. □

In the example above, the squared norms $\|e_k\|^2$ are $0, 16, 16, 32$ and the dot products $x \cdot e_k$ are $0, 12, 4, 16$, so the scores are $0, -8, 8, 0$, and the smallest again selects $(4,0)$. On the GPU the dot products of 8 192 steps with 1 024 prototypes form a single matrix product, after which a small kernel finds the smallest score in each row.

D. Quantizing groups of bands

The analysis of Section IX-A showed that four levels over a whole step lose too much detail: 256 numbers are a great deal to describe with four choices among 1 024 prototypes. Our final tokenizer changes two things. A step becomes a single frame, 128 numbers covering 10.7 ms, so that each code describes a shorter moment. And the 128 bands are divided into $G = 4$ groups of 32 neighboring bands, from the lowest frequencies to the highest, each with its own residual codebooks. A group of 32 numbers is far easier to describe with 1 024 prototypes than a whole step: the same number of prototypes now covers a much smaller space, so each one lies closer to the vectors it stands for.

Each group is quantized in 4 levels, so a step is described by $C = 4 \times 4 = 16$ codes. They are ordered level by level: first the coarse code of every group, then their first corrections, and so on, which preserves the coarse-to-fine order on which the delay pattern relies (Section V). The change halves the reconstruction error (Section IX-A). A control with 16 levels and no groups shows that most of that gain comes from the larger number of

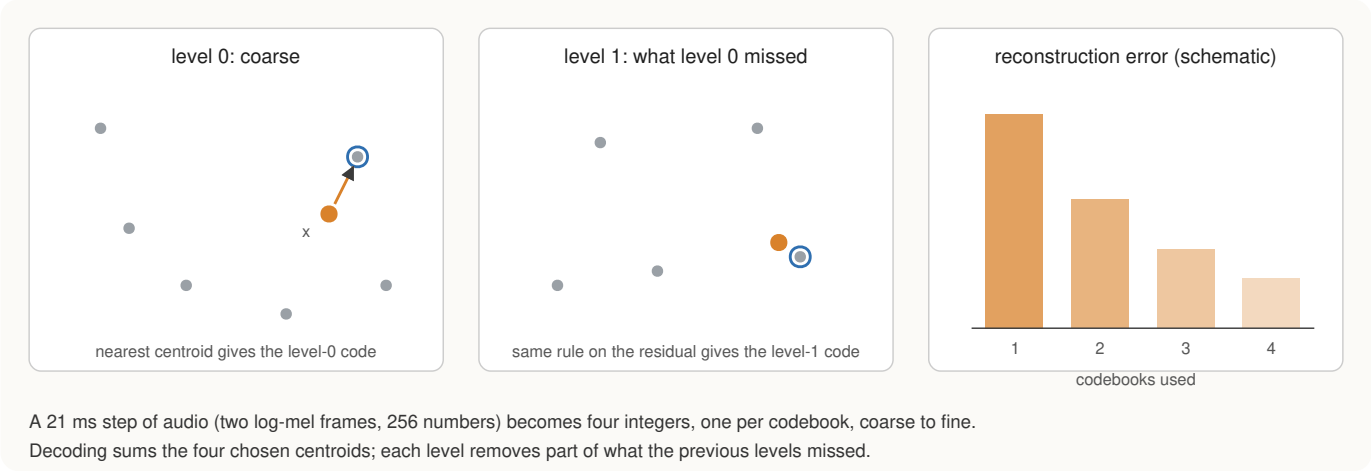


Fig. 4. Residual quantization as a picture. Level 0 replaces a step x by the nearest of its prototypes (left); level 1 applies the same rule to what level 0 missed (middle); each further level removes part of the error that remains (right, schematic). The step is then described by one code per level.

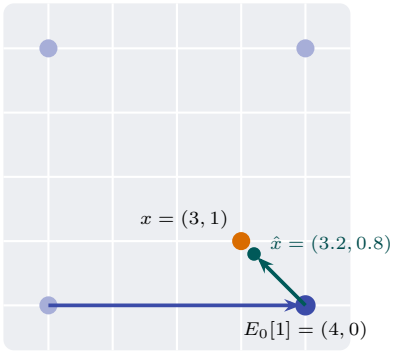


Fig. 5. Residual quantization of $x = (3, 1)$ in two levels. Level 0 (blue) chooses the prototype $(4, 0)$, and level 1 (green) adds the correction $(-0.8, 0.8)$.

codes per step, and a smaller part from the grouping; Table XV in the appendix compares all the configurations we tried.

E. Hearing more of a song

A language model can relate only what falls inside its context, the stretch of sequence it attends to at once. Our larger model reads sequences of 1 408 positions, of which the prompt (the caption, the lyrics field and the two markers) occupies 384, leaving 1 024 positions for audio. With one frame per step, at $f_s/H = 93.75$ steps per second, those positions hold only 10.9 s of music. That is about two sung lines: too little to hear a verse followed by a chorus, or a riff that returns. The cost of a training step grows with the number of positions, so a longer context within the same budget requires steps that each describe more time.

Our third tokenizer therefore joins 4 frames into each step and keeps the 4 band groups and 4 levels of Section IV-D. A step then covers 42.7 ms, the vector of each group grows from 32 to $4 \times 32 = 128$ numbers, and the same 1 024 audio positions hold 43.7 s of music, four times as much, at an unchanged cost per training step. The price is a coarser description, since the 1 024 prototypes of a codebook must now cover vectors four times as long. Section IX-F measures that price on the same songs for both tokenizers.

V. The Model

At the heart of StaleyNET is a Transformer of the kind used for language models such as GPT-2 [29], [30] (Figure 6): a stack of identical blocks that reads one long sequence, beginning with the text and continuing with the audio, and predicts at every position what comes next. It is called *decoder-only* because one stack both reads the text and produces the audio, with no separate encoder.

A. The probability model

The whole system rests on one modeling decision, which also explains the shape of the rest of this section. Let $\mathcal{T}$ be the conditioning text, the caption and, when present, the lyrics, given as a string of bytes. Let a piece of music be the sequence of its tokenizer steps $a_1, \ldots, a_F$, where step t consists of the C codes $a_t^0, \ldots, a_t^{C-1}$, ordered from coarse to fine. We model the probability of a piece given its text. By the chain rule of probability, any such distribution can be written, without approximation, as a product of predictions of one code at a time:

$$p(a_1, \ldots, a_F \mid \mathcal{T}) = \prod_{t=1}^{F} \prod_{\ell=0}^{C-1} p\big(a_t^\ell \,\big|\, \mathcal{T},\, a_{<t},\, a_t^{<\ell}\big),$$

where $a_{<t}$ stands for all the codes of steps $1, \ldots, t-1$ and $a_t^{<\ell}$ for the codes $a_t^0, \ldots, a_t^{\ell-1}$ of step t that are coarser than a_t^ℓ. In words, the probability of a piece is the probability of its first code given the text, times the probability of the second given the text and the first, and so on. Each factor asks only what comes next, given everything before it. This is exactly the question that an autoregressive Transformer answers, and it turns a distribution over whole pieces, which no network could represent directly, into a sequence of classifications among $K = 1\,024$ codes.

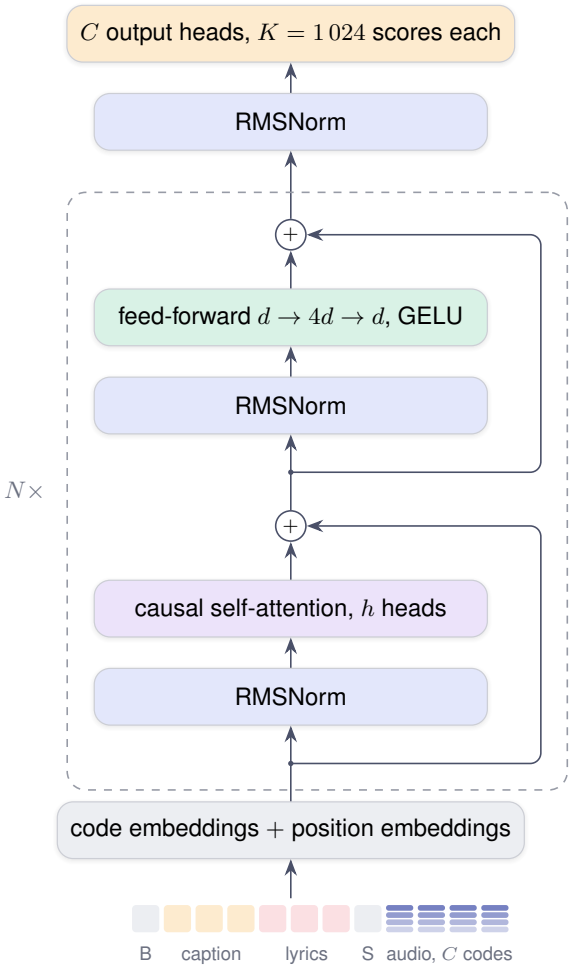


Fig. 6. The model. Text bytes and audio tokens share one sequence, and each audio position carries all the codes of one step. A stack of pre-normalized blocks, each adding its result to its input, ends in one output head per code.

The factorization determines both halves of the system. *Training* chooses the parameters θ that make the recorded pieces as probable as possible. Taking the logarithm turns the product into a sum, so maximizing the likelihood is the same as minimizing the sum of $-\ln p_\theta$ over every code of every piece, which is the cross-entropy loss of Section V-D. Because each factor depends only on earlier codes, all the factors of a training sequence can be evaluated in a single forward pass, with a causal mask that hides later positions from earlier ones. *Generation* follows the same product forward: it draws the first code from its predicted distribution, appends it to the sequence, draws the next, and so on, so that the finished piece is a sample of $p_\theta(\cdot \mid \mathcal{T})$; top-$k$ sampling and guidance (Section VII) adjust the distribution at each step.

Each factor conditions code ℓ of a step on the coarser codes of the same step, because a correction is easier to predict once the value it corrects is known. A model that predicted all C codes of a step at one position would have to drop that conditioning. The delay pattern below restores it at a small cost.

B. One sequence for text and audio

A Transformer reads a sequence of *positions*, and each position holds one or more symbols from a shared vocabulary. StaleyNET's vocabulary combines three kinds of symbol: the 256 possible values of a byte, so that any text can be written directly as its UTF-8 bytes with no separate text encoder [9]; three markers, `BEGIN`, `SEPARATOR` and `PADDING`, which delimit the parts of the sequence; and $C \cdot K$ audio symbols, one for each prototype of each codebook. Text always fills 128 positions: `BEGIN`, up to 126 caption bytes (padded when shorter) and `SEPARATOR`. Keeping that length fixed makes the audio start at the same position in every sequence, which simplifies both training and generation.

Each audio position carries all C codes of one step. A learned vector of d numbers, its *embedding*, represents every symbol and every position, and an audio position enters the model as the sum of the embeddings of its C codes and of the position itself.

C. The delay pattern

At each position the model predicts C codes at once, one per output head. The factorization of Section V-A, however, asks for each finer code only after the coarser codes of the same step are known.

Definition V.1 (Delay pattern [2])**.** Write a_u^ℓ for the code of codebook ℓ at step u. Position t of the delayed sequence holds, in slot $\ell \in [0, C)$, the code $a_{t-\ell}^\ell$, so that codebook ℓ runs ℓ positions behind codebook 0, and an empty marker when $t - \ell$ is not a step of the piece. A piece of F steps becomes $F + C - 1$ positions.




Fig. 7. The delay pattern for three codebooks and four steps. The letters a, b and c stand for codebooks 0, 1 and 2, and the subscript is the step. At position 2 the model predicts a_2, b_1 and c_0, and the coarser codes that they refine are already part of its input.

In Figure 7, position 2 predicts a_2, b_1 and c_0 together. By then a_1, which b_1 refines, and a_0 and b_0, which c_0 refines, are already known. Code ℓ of every step is therefore predicted after all coarser codes of its step, as the chain rule requires. The price is $C - 1$ additional positions, whereas giving each codebook its own positions would multiply the length of the sequence by C.

D. The network and its objective

Each block does two things. *Attention* lets every position gather information from earlier positions: each position forms a

query, compares it with a key formed by every earlier position, and takes a weighted average of their values, the weights reflecting how well query and key match. Attention is *causal*: a position may look only at itself and at earlier positions, since during generation later ones do not yet exist. A small *feed-forward* network then transforms each position on its own. Each part first rescales its input to a standard size (RMS normalization [24], [31]) and then adds its result to its input rather than replacing it, a *residual connection* that keeps deep stacks easy to train:

$$h = x + \mathrm{Attention}(\mathrm{Norm}(x)),$$
$$y = h + \mathrm{FeedForward}(\mathrm{Norm}(h)),$$

where x is the sequence entering the block, one vector of d numbers per position, and y the sequence leaving it. Attention is split into h *heads*, each attending with its own d/h numbers, so that different heads can track different relations; the feed-forward network expands each vector to $4d$ numbers, applies the GELU activation [32], and projects it back to d. Table III lists the three models of this paper.

TABLE III
MODEL SIZES: BLOCKS N, WIDTH d, HEADS h AND CODES PER STEP C.

model	N	d	h	C	parameters
first	6	256	8	4	7.1 M
large (Section IX-C)	8	512	8	16	42.9 M
rock (Section IX-F)	10	1 024	16	16	161.2 M

At position p the model outputs, for each codebook ℓ, a score for each of the K possible codes, and a softmax turns the scores into a probability distribution over the code $y_{p,\ell}$ that appears at position $p+1$. The loss is the cross-entropy, averaged first over the set V_ℓ of positions that have a target in codebook ℓ and then over the codebooks:

$$\mathcal{L} = \frac{1}{C}\sum_{\ell=0}^{C-1}\frac{1}{|V_\ell|}\sum_{p\in V_\ell} -\ln P_\theta\big(y_{p,\ell} \mid z_0,\dots,z_p\big),$$

where z_p is the input at position p, θ denotes the parameters, and $P_\theta(y \mid \cdot)$ is the probability that the model assigns to the correct code y. This is the negative logarithm of the likelihood of Section V-A, averaged per code, so minimizing it maximizes the probability of the training music. The loss is measured in nats per code. A model that assigns equal probability to all 1 024 codes has a loss of $\ln 1024 \approx 6.93$, and lower values mean that the model has learned something about the music.

E. Gradients by hand

As far as we know, no automatic differentiation is available for Rust on the GPU, so each layer implements its own gradient. Attention is the least obvious case. For one head, let the rows of Q, K and V be the queries, keys and values of the positions: each position *asks* with its query, the similarity of a query and a key decides how much attention a position pays to another, and the values are what is passed along. In this subsection K and V denote keys and values rather than codebook sizes, and d denotes the width of one head. With T positions, Q, K and V are $T \times d$ matrices, and

$$S = QK^\top/\sqrt{d} + M, \qquad P = \mathrm{softmax}(S), \qquad O = PV,$$

where S, P and the mask M are $T \times T$, O is $T \times d$, M is $-\infty$ above the diagonal so that no position attends to a later one, and the softmax turns each row of scores into weights that are positive and sum to 1.

Proposition V.1. *Let ∂O be the gradient of the loss with respect to O, and similarly for the other matrices, and let δ_{jk} be 1 when $j = k$ and 0 otherwise. Then $\partial V = P^\top \partial O$, $\partial P = \partial O\, V^\top$, $\partial S_{ik} = P_{ik}(\partial P_{ik} - \rho_i)$ with $\rho_i = \sum_j \partial P_{ij} P_{ij}$, $\partial Q = \partial S\, K/\sqrt{d}$ and $\partial K = \partial S^\top Q/\sqrt{d}$.*

Proof. The first two identities follow from $O = PV$. Within a row, $\partial P_{ij}/\partial S_{ik} = P_{ij}(\delta_{jk} - P_{ik})$, so $\partial S_{ik} = \sum_j \partial P_{ij} P_{ij}(\delta_{jk} - P_{ik}) = P_{ik}(\partial P_{ik} - \rho_i)$. The last two follow from $S = QK^\top/\sqrt{d}$. Where $M = -\infty$ we have $P_{ik} = 0$ and therefore $\partial S_{ik} = 0$. □

Apart from ∂S, every gradient is a matrix product and runs on the same kernel as the forward pass. Because hand-written gradients are easy to get wrong, a test perturbs three random entries of every parameter tensor by $\pm 10^{-2}$ and checks that the resulting change of the loss agrees with the computed gradient to within 5 %.

VI. LYRICS

A caption describes how a piece should sound, but not which words should be sung. To make the words controllable, the model needs a second text input, and it needs training examples in which it can hear which words are sung where.

A. A position map that preserves a trained model

The lyrics occupy $L = 256$ byte positions between the caption and the separator. Each position p takes its position embedding from row $\pi(p)$ of a table of learned vectors, and the choice of the map π determines whether a model trained without lyrics can later be extended (Figure 8). Simply inserting the lyrics would shift every later position, so the audio would read embeddings that the trained model had learned for other places.

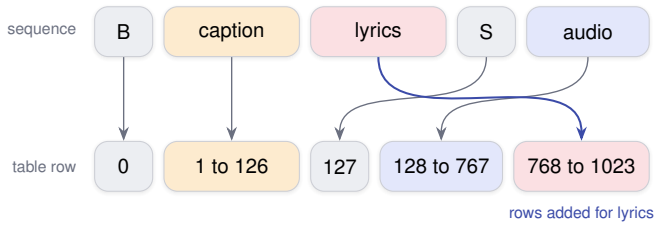


Fig. 8. The position map π. Positions outside the lyrics keep the rows that they used before the lyrics were added, and the lyrics use new rows appended to the table.

Definition VI.1 (Position map)**.** Suppose that position 0 holds `BEGIN`, the caption occupies positions $[1, 1{+}P)$, where P is the number of caption bytes, the lyrics occupy $[1{+}P, 1{+}P{+}L)$, and the position table of the model without lyrics has T rows, one for each position it can read. Then

$$\pi(p) = \begin{cases} p & \text{if } p < 1 + P, \\ T + p - 1 - P & \text{if } 1 + P \le p < 1 + P + L, \\ p - L & \text{otherwise.} \end{cases}$$

Lemma VI.1. *Every position outside the lyrics uses the row that the same part of the sequence used without lyrics, and the lyrics use only the new rows* $[T, T + L)$.

Proof. Caption positions are unchanged. The separator and the audio are shifted right by L positions, and π subtracts L. The lyrics are mapped onto $T + [0, L)$. □

For example, with $P = 2$, $L = 3$ and $T = 16$, positions 0 to 8 use the rows

$$0,\ 1,\ 2,\ 16,\ 17,\ 18,\ 3,\ 4,\ 5.$$

A trained model can therefore be extended by appending L new rows to its table. All learned parameters keep their meaning, and training simply continues.

B. Pairing audio with the words sung in it

A training example covers a window of a song, and it should carry the lines sung in that window. JamendoLyrics [13] gives the start and end time of every line of 78 songs in English, French, German and Spanish, and a window, the stretch of a song shown to the model in one training example, receives each line whose time span overlaps it. Takes recorded with our studio come with their text but without timings, so we assume that their lines are spread evenly over the take; this is a fair approximation for short takes of continuous singing. Because the lyrics corpus is small (4.7 hours, against 23 hours of captioned music), each dataset receives a sampling weight: a weight of w makes each of its songs w times as likely to be drawn.

a) Drawing sung passages more often.: A window drawn at a random place often falls on an instrumental passage, where the lyrics field is empty and the example teaches nothing about words. Two settings counter this in the larger corpora of Section IX-F. First, every song with lyrics receives an extra sampling weight, so that it is drawn more often than a song without. Second, with probability p a window of a song with lyrics starts 1 s before a line chosen at random, rather than at a random step, so that it opens with the lead-in to the singing and contains the line itself. The remaining windows are drawn as before, from songs with and without lyrics alike, so that the model still learns music in general.

C. Testing whether the lyrics are used

A model can lower its loss on the lyrics corpus simply by learning how those particular songs sound, without reading their words. We therefore test the use of the lyrics directly, by giving the model the same audio with the correct words, with no words, and with words from another song.

LYRICS-TEST$(\theta, \mathcal{D}, B)$

Input: a trained model with parameters θ, a set $\mathcal{D}$ of held-out songs with timed lyrics, and a number of batches B, each a few windows drawn at random.
Output: the mean paired difference $\bar{\Delta}$ and its standard error s, both in nats per code, and whether the difference is clearly positive.

1 **for** $b \in [0, B)$ {
2 draw a batch of windows from the songs in $\mathcal{D}$
3 $\mathcal{L}_b^{\text{right}}$ = loss of θ with each window's own lyrics
4 $\mathcal{L}_b^{\text{none}}$ = loss of θ with empty lyrics
5 $\mathcal{L}_b^{\text{wrong}}$ = loss of θ with lines from another song
6 }
7 $\Delta_b = \mathcal{L}_b^{\text{wrong}} - \mathcal{L}_b^{\text{right}}$ for each b
8 $\bar{\Delta} = \frac{1}{B}\sum_b \Delta_b$
9 $s = \sqrt{\mathrm{Var}(\Delta)/B}$
10 **return** $\bar{\Delta}$, s, and whether $\bar{\Delta} > 2s$

$\mathcal{L}_b$ denotes the loss of batch b, $\mathrm{Var}(\Delta)$ is the sample variance of the B differences, and the standard error s estimates how much $\bar{\Delta}$ would vary if the test were repeated on other batches. Requiring $\bar{\Delta} > 2s$ corresponds roughly to 95 % confidence that the difference is positive. Lines 3–5 score the same windows, so the differences in line 7 compare like with like, and most of the variation between windows cancels. A model that ignores the words gives $\bar{\Delta} \approx 0$. A model that reads them should predict the audio better with the right words than with the wrong ones, giving $\bar{\Delta} > 0$, measured in nats per code. The wrong lines in line 5 always begin at a sung line rather than at silence, and comparing lines 4 and 5 helps distinguish a reaction to the presence of text from a reaction to its content.

VII. Generation

Generation follows the factorization of Section V-A forward. Given the text, the model predicts a distribution over the codes at the next position, one code is drawn from each of these distributions, the drawn codes are appended to the sequence, and the step repeats until the piece reaches its requested length. Two refinements make this loop practical: a cache that avoids recomputing the past, and sampling rules that shape each draw.

A. The key/value cache

Position p attends to the keys and values of positions $0, \ldots, p$. These do not change once they have been computed, because no position attends forward, so a cache can keep them [33], and each new position then costs one pass through the blocks instead of a pass over the whole sequence. In the procedure below, j indexes the blocks, q, k and v are the query, key

and value vectors of position p, and π is the position map of Section VI.

DECODE-STEP$(z, p, cache)$

Input: the symbols z to place at position p (a byte, or the C codes of a step), the position index p, and the cache: for every block, the key and value vectors of positions $0, \dots, p-1$.
Output: for each codebook, K scores for the code at position $p+1$; the cache is extended by position p.

1 $h = \text{embed}(z) + \text{position}(\pi(p))$
2 **for** each block j {
3 $q, k, v =$ query, key and value projections of $\text{Norm}(h)$
4 $cache_j[p] = (k, v)$
5 $h = h + \text{Attend}(q,\ cache_j[0\,..\,p])$
6 $h = h + \text{FeedForward}(\text{Norm}(h))$
7 }
8 **return** the output-head scores of $\text{Norm}(h)$

Theorem VII.1. *Feeding a sequence position by position through* ***DECODE-STEP*** *yields, at every position, the same scores as a single forward pass over the whole sequence.*

Proof. We argue by induction over the blocks. At block 0, the input at position p depends only on the token and the position of p. Suppose that the inputs of block j agree at all positions up to p. Then the keys and values computed in line 3 agree, and when position p is processed the cache holds exactly those of positions $0, \dots, p$. In the full pass the mask gives zero weight to later positions, so attention at p combines the same keys and values with the same weights, and the feed-forward network acts on each position separately. The outputs of block j, which are the inputs of block $j+1$, therefore agree up to position p. □

A test checks the theorem numerically, to within 10^{-4} at every position, for models with and without lyrics; the second case also checks the position map π. Because the cache has a fixed capacity, a step allocates no memory.

B. Sampling and guidance

For each codebook we keep the $k = 250$ most probable of the $K = 1\,024$ codes and draw among them in proportion to their probabilities [7]; excluding the unlikely codes avoids rare mistakes that the model could not recover from. Because the text was removed from 10 % of the training examples, the same model can predict both with the text, giving scores z^{text}, and without it, giving z^{none}; here z denotes a vector of K scores, which a softmax turns into probabilities. Classifier-free guidance [8] amplifies their difference:

$$z = z^{\text{none}} + s\left(z^{\text{text}} - z^{\text{none}}\right),$$

where s is the guidance scale, a plain number ($s = 1$ uses the text as trained, and larger values follow it more strictly); this s is unrelated to the standard error of Section VI-C. For instance, if two codes score $(2, 1)$ with the text and $(1, 1)$ without it, the first has probability 0.73; with $s = 3$ the scores become $(4, 1)$, and its probability rises to 0.95. We use $s = 3$, which doubles the computation per step. Lyrics longer than L bytes are cut at line breaks into windows that are presented in turn, each over an equal share of the output, while the most recent audio is kept as context.

VIII. GPU KERNELS

Almost all of the arithmetic in StaleyNET is matrix multiplication: the spectrogram, the nearest-prototype search, every projection of the Transformer and both products inside attention. A GPU runs thousands of lightweight *threads* at once, grouped into *blocks* that cooperate, so the speed of the whole system depends on how well one matrix-product kernel keeps those threads busy and fed with data. Our tutorial [5] derives the shared-memory tiled product in detail. Here we describe two further steps, register blocking, which roughly doubles its speed, and tensor cores, which nearly double it again, and a way to make one gradient repeatable bit for bit.

A. Register blocking

A GPU runs many *threads* at once, grouped into *blocks* that cooperate. Each thread has up to 255 fast *registers*, the threads of a block share a small on-chip *shared memory*, and all threads can reach the large but slow *global memory*. In the tiled kernel for $C = AB$, a block of 16×16 threads copies square pieces (*tiles*) of A and B into shared memory, which reduces traffic to global memory sixteenfold [5], [34]. Every multiply-add still reads two values from shared memory, however, and shared memory is slower than a thread's registers. Register blocking [35] lets each thread compute an $r \times r$ group of outputs, so that every value it reads is used r times (Figure 11).

BLOCKED-THREAD(t_x, t_y)

Input: the column t_x and row t_y of a thread within a block of 16×16 threads, both in $[0, 16)$; the block computes a 64×64 tile of $C = AB$, and each thread computes $r \times r = 4 \times 4$ of its entries.
Output: the 16 entries of the tile owned by the thread, written to C.

1 $sum[i][j] = 0$ for $i, j \in [0, r)$
2 **for** each phase t {
3 copy a 64×16 tile of A into *tileA*
4 copy a 16×64 tile of B into *tileB*
5 **BARRIER**()
6 **for** $u \in [0, 16)$ {
7 $\alpha_i = tileA[t_y + 16i][u]$ for $i \in [0, r)$
8 $\beta_j = tileB[u][t_x + 16j]$ for $j \in [0, r)$
9 $sum[i][j] = sum[i][j] + \alpha_i \beta_j$ for $i, j \in [0, r)$
10 }
11 **BARRIER**()
12 }
13 store $sum[i][j]$ at row $t_y + 16i$, column $t_x + 16j$ of the tile

BARRIER() waits until every thread of the block has reached it. A *phase* handles 16 consecutive values of the inner

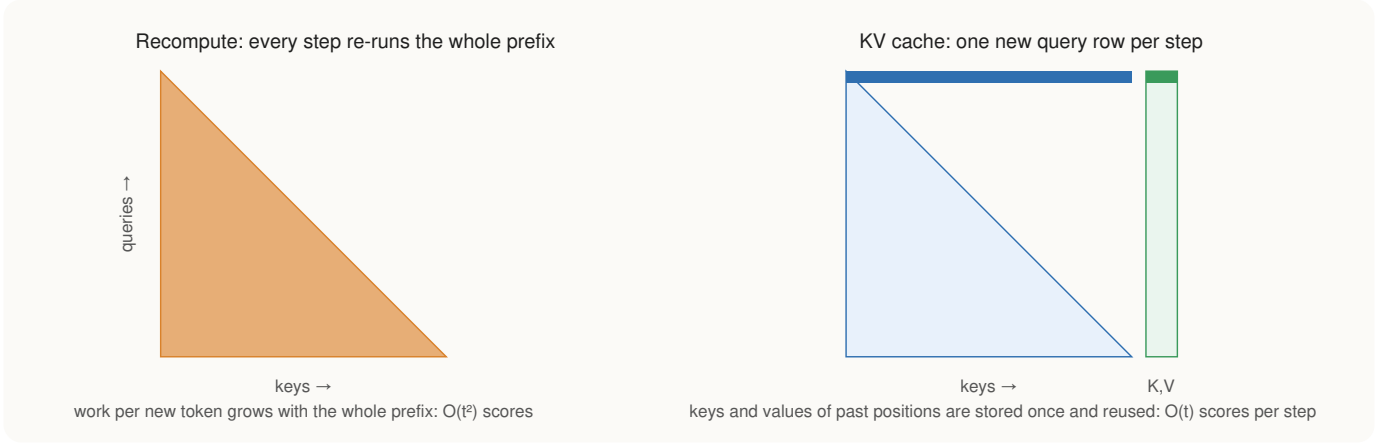


Fig. 9. Why a key/value cache helps. Recomputing the whole prefix at every step evaluates a growing triangle of attention scores (left), so the work per new code grows with the length of the sequence; with a cache, each step computes one new row of scores against the stored keys and values (right).

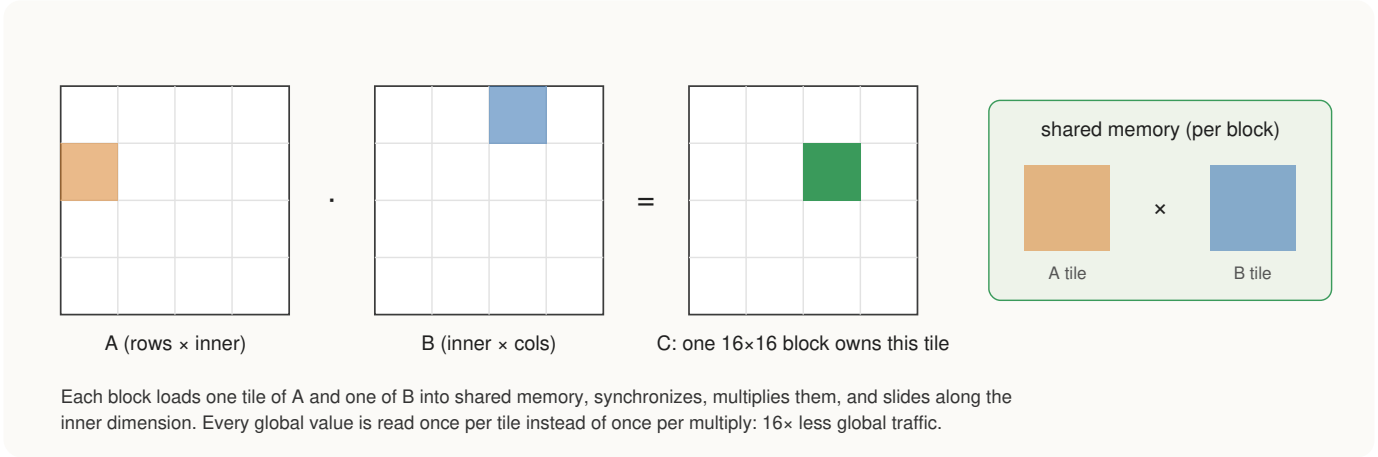


Fig. 10. Shared-memory tiling, the starting point of register blocking. Each block of threads copies one tile of A and one of B into the fast memory it shares, synchronizes, multiplies them, and slides along the inner dimension, so every value fetched from global memory is used 16 times.

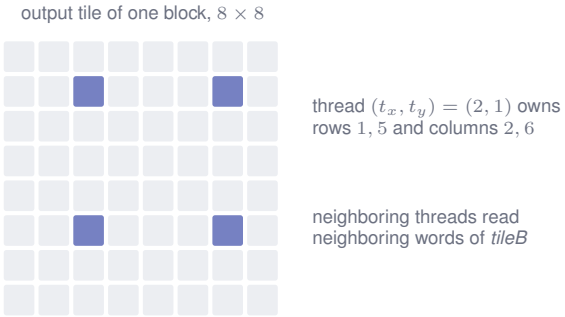


Fig. 11. Register blocking with 4×4 threads and $r = 2$. Each thread computes r^2 outputs spread over the tile, in rows $t_y + 4i$ and columns $t_x + 4j$. Our kernel uses 16×16 threads, $r = 4$ and a 64×64 tile.

dimension, so the loop of line 2 runs once for every 16 columns of A. *tileA* and *tileB* live in shared memory, while sum, α and β live in the thread's registers; in this subsection α and β are these register copies, unrelated to the momentum and the Kaiser parameter above. Lines 7 and 8 read $2r = 8$ values from shared memory, and line 9 performs $r^2 = 16$ multiply-adds, so each multiply-add costs $2/r = 0.5$ reads instead of 2. Global traffic falls as well: each phase copies $2 \cdot 64 \cdot 16$ values for $64 \cdot 64 \cdot 16$ multiply-adds, so the product of an $M \times K$ and a $K \times N$ matrix (here M, N and K are matrix dimensions) fetches

$$\frac{M}{64} \cdot \frac{N}{64} \cdot \frac{K}{16} \cdot 2 \cdot 64 \cdot 16 = \frac{2MNK}{64}$$

values of 4 bytes each, a quarter of the $2MNK/16$ needed with 16×16 tiles. The two barriers play the same roles as in the tiled kernel, whose correctness is proved in [5]. On the Orin NX the blocked kernel is 1.8 to 2.3 times faster than the tiled one (Table XII).

B. Tensor cores

Recent NVIDIA GPUs contain *tensor cores*, units that multiply small matrices in a single instruction executed jointly by the 32 threads of a *warp*. The instruction we use, `mma.m16n8k8` in the TF32 format [36], computes $D = AB + C$ for a 16×8 block of A and an 8×8 block of B, adding into a 16×8 block

of C that the warp holds in 32-bit registers, four per thread. TF32 keeps the 8-bit exponent of a 32-bit float but rounds the mantissa to 10 bits, so each input carries a relative rounding error of at most 2^{-11}, while the sums stay in 32 bits.

The tensor-core kernel keeps everything of **BLOCKED-THREAD** except the loop of lines 6 to 10: the same 64×64 tiles, the same copies into shared memory and the same barriers. Each value is rounded to TF32 once, as it is copied. The 256 threads of a block form 8 warps, arranged 4×2 over the tile, so that each warp owns a 16×32 slice of it; for every 8 values of the inner dimension, a warp reads one block of *tileA* and issues four instructions, one for each 16×8 part of its slice. Two details matter. A warp reads the same column of 8 rows of *tileA* at once, and with rows of 16 values these reads fall into 2 of the 32 banks of shared memory and are served one after another; padding the rows to 20 values (and those of *tileB* from 64 to 72) spreads them over distinct banks. And all 32 threads of a warp must take part in every instruction, so the loops are the same for every thread, and only the final store checks the bounds of the matrix.

TABLE IV
THE BLOCKED KERNEL AND THE TENSOR-CORE KERNEL ON THE JETSON AGX THOR, IN GFLOP/S, MEASURED WHILE A TRAINING RUN SHARED THE GPU, AND ONE TRAINING STEP OF THE 161 M-PARAMETER MODEL OF TABLE III.

product ($M \times N \times K$)	blocked	tensor cores
attention projections ($2\,048 \times 768 \times 256$)	469	929
feed-forward ($2\,048 \times 1\,024 \times 256$)	444	730
codebook heads ($2\,048 \times 4\,096 \times 256$)	494	970
spectrogram ($4\,096 \times 513 \times 1\,024$)	447	831
training step, 161 M model	11.33 s	6.48 s

The products run 1.6 to 2.0 times faster, and a training step of the largest model 1.75 times (Table IV). To check that the lower precision does not change training, we trained a small model ($d = 256$, $N = 4$) for 200 steps from the same initialization on the same batches with both kernels; at every logged step the two losses differ by at most $2 \cdot 10^{-5}$ nats per code. At about 1 TFLOP/s the kernel still uses a small fraction of the tensor cores: it waits for each tile to arrive before multiplying it, and copying the next tiles while the current ones are multiplied is the obvious next step.

C. A repeatable embedding gradient

The embedding table has one row of d numbers per vocabulary symbol, and its gradient adds the gradient vector g_p (also d numbers) of each position p into the row of the token z_p that the position holds. Many positions share a token. With atomic additions, threads would add into a shared row in an order that varies from run to run, and because floating-point addition is not associative, the result would vary as well. We fix the order with a counting sort.

EMBEDDING-GRADIENT(z, g, V)

Input: for every position p, its token $z_p \in [0, V)$ and its gradient vector g_p of d numbers; and the number of rows V of the embedding table (the vocabulary size).
Output: the gradient G of the embedding table, a $V \times d$ matrix with one row per token; $c \in [0, d)$ indexes its columns.

1 $count[v] = |\{p : z_p = v\}|$ for $v \in [0, V)$ *// on the CPU*
2 $start[v] = \sum_{u<v} count[u]$
3 $list =$ positions sorted by token, then by position
4 **for** each token v and column c, in parallel { *// on the GPU*
5 $G[v][c] = \sum g_p[c]$ over p in $list[start[v] \,..\, start[v+1])$, in order
6 }

For the tokens $z = (2, 0, 2, 1)$, the counts are $(1, 1, 2)$, the starts are $(0, 1, 2, 4)$ and the list is $(1, 3, 0, 2)$, so token 2 receives $g_0 + g_2$ in that order. Each entry is summed by one thread in a fixed order, so the result is the same on every run, and a whole training run can be repeated bit for bit on the same device.

IX. EXPERIMENTS

Our main corpus is the Song Describer Dataset [37]: 706 two-minute Creative Commons excerpts with 1 106 captions written by listeners. Songs are split between training and evaluation by artist, so that no voice appears on both sides, leaving 667 songs for training and 39 for evaluation; Table XI in the appendix describes the hardware. We report spectral errors as the mean absolute difference between two log-mel spectrograms, averaged over frames and bands, in *log units per band*. Because the spectrogram holds natural logarithms of energy, an error of one log unit means that a band's energy is off by a factor of $e \approx 2.7$, or $10 \log_{10} e \approx 4.3$ dB.

a) Correctness and speed.: All 169 tests pass on the Orin NX, and the kernel tests also pass on the Thor. They compare every kernel with a CPU implementation at deliberately awkward sizes, check every gradient numerically, verify the cache theorem, and confirm that a small network can memorize a fixed batch. On the Orin NX, register blocking makes a training step of the first model 1.8 times faster than tiling and 9.3 times faster than the direct kernel (Table XIII).

b) First training runs.: Table V summarizes the runs with the first tokenizer. A training *step* here is one update of the parameters, computed from a batch of 8 sequences; the held-out loss is measured on songs by artists that the model never heard during training. A run of 1 500 steps reached a held-out loss of 4.93, and a run of 15 000 steps on the Thor reached 4.02. When we restricted the data to the 281 songs whose captions mention a voice, a model fine-tuned from the longer run reached its best held-out loss of 4.23 after only 250 steps, after which its held-out loss rose while its training loss continued to fall; a model trained from scratch on the same songs reached 4.72. The vocal subset appears to be too small for long training.

A. What limits the sound

The generated voices sounded pitched but blurred. To find out why, without involving the model, we rendered 12-second excerpts of four held-out vocal songs through each stage of the

TABLE V
BEST HELD-OUT LOSS WITH THE FIRST TOKENIZER, IN NATS PER CODE (UNIFORM GUESS: 6.93).

run	data	steps	loss (nats per code)
first run, Orin NX	all songs	1 500	4.93
longer run, Thor	all songs	15 000	4.02
fine-tuned, Thor	vocal songs	250	4.23
from scratch, Orin NX	vocal songs	5 500	4.72

pipeline and compared the results with their exact spectrograms (Figure 12 and Table VI).

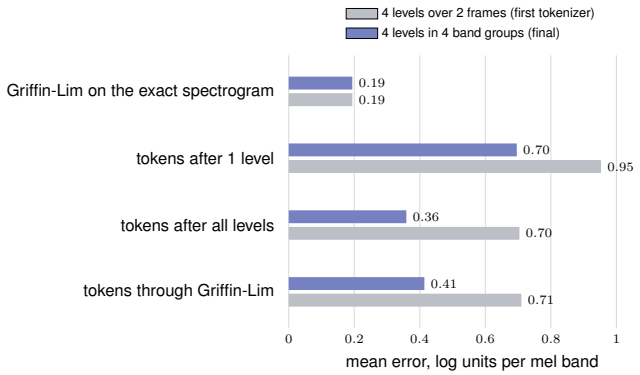


Fig. 12. Mean spectral error of each stage on four held-out vocal excerpts, for the first tokenizer (gray) and the final one (blue). The bottom pair is the best that any model trained on these tokens could achieve.

With the first tokenizer, the tokens alone caused 3.6 times the error of the vocoder, and the end-to-end error of a perfect model, 0.71, was almost entirely due to the tokenizer. An error of about 0.7 log units, roughly 3 dB in every band, is enough to blur the harmonic and formant detail on which an intelligible voice depends. This measure does not capture the phase artifacts of Griffin-Lim, which remain audible, so the tokenizer is the main spectral limitation rather than the only audible one.

To examine the model on its own, we trained it on a single 12-second excerpt of 562 steps. Its training loss fell to 0.054 after 100 steps and to 0.002 after 200. We then generated 12 seconds from the excerpt's caption and compared the generated codes with the excerpt's own (Table VII). Greedy decoding reproduced all 562 steps, and top-k sampling departed from the excerpt only at isolated codes, without drifting away.

The model can reproduce audio exactly, and when it does, the result sounds like the tokenizer's reconstruction. These two observations led us to improve the tokens before training larger models.

B. A finer tokenizer

Guided by this analysis, we compared tokenizers that differ in the number of frames per step, the number of band groups and the number of levels (Table XV). Quantizing one frame per step in 4 band groups with 4 levels each lowered the mean error on the held-out songs from 0.776 to 0.401. A control without band groups suggests that most of this gain comes from the larger number of codes per step, and a smaller part from the grouping. On the four vocal excerpts of Figure 12, the error of the tokens fell from 0.70 to 0.36, and the end-to-end error from 0.71 to 0.41. The price is a vocabulary of 16 codebooks instead of 4.

C. A larger model on the finer tokens

With the finer tokens we trained a larger model on the Thor: 8 blocks of width 512, 42.9 million parameters, with the lyrics input enabled from the start. It was trained on all 742 training songs of the combined corpora, with the lyrics corpus weighted 4-fold and two takes recorded by the first author weighted 10-fold, in batches of 8 sequences. A step took 2.0 seconds and about 11 GB of the Thor's 128 GB of memory. Its best held-out loss, averaged over its 16 codebooks, was 5.062 nats per code at step 18 500 of 20 000. Because the vocabulary differs, this figure is not comparable with those of Table V.

D. Overfitting

A model *overfits* when it learns the particular songs it was trained on instead of what they have in common: its loss on the training songs keeps falling while its loss on held-out songs does not. We call the difference between the two losses the *generalization gap*. Table VIII shows it for the model of Section IX-C, with the training loss averaged over the 1 000 steps before each point. From step 15 000 the held-out loss no longer improved while the training loss kept falling, and the gap grew to 0.975 nats per code. Because the loss is a mean negative log-probability, this means that the model assigned to a code of a training song, as a geometric mean, $e^{0.975} \approx 2.7$ times the probability it assigned to a code of an unheard song. In informal listening the model returned nearly the same song for different prompts and repeated a line of lyrics from its training data.

The cause is how often each song was seen. Every training sequence is a window of a song drawn at random, and song i, with sampling weight w_i, is drawn with probability w_i/W, where $W = \sum_j w_j$ sums the weights of all training songs. A run of S steps with B sequences per step therefore draws song i on average

$$E_i = SB\,\frac{w_i}{W} \tag{1}$$

times. With $S = 20\,000$, $B = 8$ and the weights above, $W = 979$, so each Song Describer song was drawn about 163 times, each lyrics song about 654 times, and each of the two takes about 1 634 times. The lyrics songs and the takes were also the only songs with lyrics, so the model could associate lyrics with only 75 songs, each of which it had seen hundreds of times.

We therefore replaced the run. The new run adds the 29 314 rock tracks of the Free Music Archive [26] at half the weight of a Song Describer song, gives the lyrics songs the same half

TABLE VI
SPECTRAL ERROR OF EACH STAGE ON FOUR HELD-OUT VOCAL EXCERPTS, IN LOG UNITS PER MEL BAND, FOR THE FIRST TOKENIZER AND THE FINAL ONE.

		first tokenizer		final tokenizer	
excerpt	vocoder	tokens	end to end	tokens	end to end
guitar, brass, female voice	0.230	0.807	0.821	0.425	0.480
folk metal, male voice	0.152	0.707	0.703	0.353	0.378
electronic, vocal sample	0.170	0.569	0.554	0.268	0.338
bass, piano, wordless voice	0.222	0.732	0.763	0.390	0.460
mean	0.194	0.704	0.710	0.359	0.414

TABLE VII
GENERATED CODES COMPARED WITH A MEMORIZED EXCERPT.

decoding	agreement per codebook (%)	identical prefix (steps)
greedy	100.0, 100.0, 100.0, 100.0	562 of 562
top-k, seed 1	99.6, 100.0, 100.0, 99.6	26
top-k, seed 2	100.0, 99.8, 99.3, 99.8	26

TABLE VIII
TRAINING AND HELD-OUT LOSS OF THE MODEL OF SECTION IX-C, IN NATS PER CODE. THE TRAINING LOSS IS AVERAGED OVER THE PRECEDING 1 000 STEPS.

step	training	held out	gap
2 500	5.080	5.333	0.253
5 000	4.714	5.178	0.464
10 000	4.443	5.091	0.648
15 000	4.137	5.066	0.929
20 000	4.091	5.066	0.975

weight, and leaves out the two takes, since no weight would keep two recordings from being memorized. Over $S = 30\,000$ steps, Equation (1) then gives about 16 draws for each Song Describer song and about 8 for every other song. The Song Describer songs keep the larger weight because their captions are sentences written by listeners, whereas the rock tracks carry only genre tags. The cost is that lyrics become rare (73 of 30 054 training songs), so this model can learn little about words. Training is in progress, and we report the generalization gap alongside the held-out loss.

E. Lyrics

We extended both vocal models of Table V with a lyrics field and trained them further on vocal songs, JamendoLyrics, and songs whose captions mention rock or a related style. Table IX gives the result of **LYRICS-TEST** for a model trained on the Thor with the lyrics corpus weighted 8-fold, over 48 batches of 4 windows.

On the held-out songs, the right and the wrong lyrics give the same loss, so this model does not yet use the words. On the training songs the difference is statistically clear but small, which we take to indicate memorization of those songs rather than a learned relation between words and sound. We hope that the paired test will be useful as a clear criterion for future attempts.

TABLE IX
LOSS WITH THE RIGHT LYRICS, NO LYRICS AND THE WRONG LYRICS, AND THE PAIRED DIFFERENCE $\bar{\Delta} \pm s$.

songs	right	none	wrong (nats per code)	$\bar{\Delta} \pm s$
held out (6)	4.3345	4.3409	4.3345	$+0.0000 \pm 0.0004$
training (73)	4.0337	4.0395	4.0378	$+0.0042 \pm 0.0006$

F. A larger rock corpus

The corpora above hold about 28 hours of music, of which few songs are rock and fewer are sung. To learn a style and a singing voice, a model needs far more examples of both, so we assembled two larger corpora.

a) A rock pilot.: The first holds the 14 109 complete songs of the MTG-Jamendo dataset [38] tagged as rock or a related style, 949 hours of Creative Commons music, split by artist with 1 387 songs held out. These songs come without lyrics, so we transcribed them with Whisper [39] and kept the transcripts of 3 853 songs; the timestamps of the transcribed lines serve as line timings. A model of the size of Section IX-C, trained with JamendoLyrics weighted 3-fold, songs with lyrics weighted 3-fold and $p = 0.75$, reached a held-out loss of 4.924 nats per code after 19 000 steps. The paired test of Section VI-C on the held-out JamendoLyrics songs gave 5.1007 nats per code with the right lyrics, 5.1008 with none and 5.1008 with the wrong ones: a difference of $+0.0001$ nats per code, so this model does not use the words either. Transcripts of a song's own vocals seem to be too sparse and too noisy a signal for a model of this size.

b) A research corpus with timed lyrics.: The second corpus, assembled for research only and not redistributed, holds 15 319 studio recordings by 170 rock artists, 1 006 hours in total. For 13 375 of them (87 %) the lyrics come with the start time of every line from LRCLIB [40], and for 860 more as plain text; the remaining 1 084 songs have no lyrics and are kept as instrumental context. Songs are split by artist, with 1 971 held out.

c) The longer context.: We fitted the 4-frame tokenizer of Section IV-E on the training songs of this corpus. On 40 held-out songs, its mean reconstruction error with all four levels

is 0.515 log units per band, against 0.382 for the 1-frame tokenizer of the pilot, which was fitted on MTG-Jamendo; the longer context thus costs about a third more spectral error. We trained the model of Section IX-C unchanged on this corpus with the 4-frame tokens, so that each training window spans 43.7 s instead of 10.9 s. Songs with lyrics and plain songs are drawn with equal weight, and half of the windows of songs with lyrics start at a line ($p = 0.5$); 107 songs by Alice in Chains and Mad Season are drawn four times as often. We stopped the run after 31 625 steps (about 29 hours at 3.3 s per step). Its held-out loss fell from 6.449 nats per code at step 500 to 5.951 at step 3 000, 5.415 at 15 000 and 5.045 at 31 500, but by then by only 0.013 nats per 1 000 steps. The first level of each band group, which carries the coarse spectrum, reached 3.3 to 3.8 nats per code, and the fourth level 5.95 to 6.28, close to the $\ln 1\,024 = 6.93$ of a uniform guess.

d) The ceiling of the pipeline.: To separate the model from the rest of the pipeline, we passed the codes of four Alice in Chains songs, without the language model, through the learned vocoder of Section III-E. They sounded close to the recordings, so the 4-frame tokens and the vocoder do not limit the output at this stage; what remains is the language model.

e) A drone from repetition.: The samples of this run, drawn with $k = 1\,024$ (no truncation) and $s = 2$, sounded like an electrical drone under a blurred voice. Counting the codes explains why (Table X). In 704 consecutive steps of a real song, the first codebook repeats the code of the previous step 10 to 12 % of the time; in the samples it did so 67 % of the time, and colder sampling made it worse, down to a single code held for 30 s. Repeating is the single most probable move in the training data, which holds held notes and silences (23 % of all steps, averaged over 300 songs), so a model that has not yet learned what comes next learns that this is its best guess. Once the context fills with repeats, it resembles a held note, which real songs continue, and the model locks in: the degeneration that Holtzman et al. [41] describe for text. Truncating to $k = 250$ with $s = 3$, as Section VII intends, brings the counts to those of real songs; a penalty that divides the probability of each codebook's previous code by a factor F [42] rescues colder sampling but did not improve $k = 250$. Matching these counts is necessary but not sufficient: the samples of $k = 250$ no longer drone, but to the ear they are still not music.

TABLE X
REPETITION IN THE FIRST CODEBOOK OVER 30 S (704 STEPS): HOW OFTEN THE CODE OF THE PREVIOUS STEP IS REPEATED, AND HOW MANY DIFFERENT CODES APPEAR. SAMPLES FROM THE MODEL OF SECTION IX-F AFTER 22 500 STEPS, ONE SEED EACH.

codes	repeated	distinct
two Alice in Chains songs	10–12 %	207–257
$k = 1\,024$, $s = 2$	67 %	64
$k = 250$, $s = 3$	9 %	257
$k = 250$, $s = 3$, $F = 8$	3 %	235
temperature 0.8, $k = 50$, $s = 3$	89 %	11
temperature 0.8, $k = 50$, $s = 3$, $F = 4$	33 %	86
temperature 0.6, $k = 20$, $s = 3$	100 %	1

f) A larger model.: Since neither the pipeline nor the sampler explains the remaining gap, and the loss has nearly stopped falling, the model itself is too small. We are therefore training the model of 161.2 M parameters of Table III on the same data, with its matrix products on the tensor cores (Section VIII-B); at 6.48 s per step, 60 000 steps take about 4.5 days. Its results will be reported in the next version of this paper.

X. LIMITATIONS

The tokenizer, although improved, still limits the fidelity of the output, and Griffin-Lim estimates phase without ever having heard real audio, which leaves a metallic smear that is most audible on voices (Section III). The learned vocoder of Section III-E is meant to remove it, but it is trained with spectral losses only; without the adversarial losses of Vocos [18], such vocoders tend to sound slightly muffled in the highest frequencies, and adding discriminators is our next step. The Creative Commons corpora contain comparatively little singing (298 of the 706 songs of the Song Describer Dataset mention a voice); the research corpus of Section IX-F supplies much more, but it cannot be shared, so those results cannot be reproduced from public data. None of our models has yet been shown to use the words of the lyrics (Section IX-F). Small datasets invite overfitting, and our first larger model overfitted (Section IX-D); apart from weight decay, prompt dropout and keeping the checkpoint with the lowest held-out loss, the model has no regularization, and in particular no dropout inside the network. Our models are much smaller than published systems [2], and we have not yet carried out a formal listening test, so we make no claims about perceived quality; the model of 42.9 M parameters reached the code statistics of real songs but not their sound (Section IX-F), and whether the larger model closes that gap is not yet known. On the implementation side, only the matrix products use the tensor cores, in TF32 and at a fraction of their peak speed; all other arithmetic uses 32-bit floating point, and attention stores its full matrix of scores [43].

XI. CONCLUSION

StaleyNET models music as a sequence of tokens whose probability given a text is factorized by the chain rule, learns every factor with one autoregressive Transformer, and generates by sampling the factors in turn. Building each stage ourselves, in Rust and on embedded GPUs, made it possible to measure each one in isolation. Those measurements located the main limitation on sound quality in the tokenizer rather than in the language model, and a tokenizer that quantizes groups of frequency bands with more codes per step halved the reconstruction error. A later count showed that the larger model heard only 10.9 s of music at a time; joining four frames into each step extends that to 43.7 s at the same cost. Trained this way on 1 006 hours of rock, the model of 42.9 M parameters stopped improving before it made music, and counting its codes showed that its drone came from the sampler's settings rather than from a fault in the pipeline. A model nearly four times

larger, its matrix products moved onto the tensor cores, is now training. We hope the worked examples, the stage-by-stage analysis and the paired lyrics test will help others who build similar systems on modest hardware.

References

[1] A. Agostinelli *et al.*, "MusicLM: Generating music from text," 2023, arXiv:2301.11325.

[2] J. Copet, F. Kreuk, I. Gat, T. Remez, D. Kant, G. Synnaeve, Y. Adi, and A. Défossez, "Simple and controllable music generation," in *Advances in Neural Information Processing Systems*, 2023, arXiv:2306.05284.

[3] NVIDIA, "cuda-oxide: A Rust to PTX compiler backend," https://github.com/NVlabs/cuda-oxide, 2026.

[4] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to Algorithms*, 4th ed. MIT Press, 2022.

[5] A. Pathak, "An introduction to tiled parallel programming, simplified," 2026, manuscript.

[6] Z. Borsos *et al.*, "AudioLM: A language modeling approach to audio generation," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2023, arXiv:2209.03143.

[7] A. Fan, M. Lewis, and Y. Dauphin, "Hierarchical neural story generation," in *Annual Meeting of the Association for Computational Linguistics*, 2018, arXiv:1805.04833.

[8] J. Ho and T. Salimans, "Classifier-free diffusion guidance," in *NeurIPS Workshop on Deep Generative Models and Downstream Applications*, 2021, arXiv:2207.12598.

[9] L. Xue, A. Barua, N. Constant, R. Al-Rfou, S. Narang, M. Kale, A. Roberts, and C. Raffel, "ByT5: Towards a token-free future with pre-trained byte-to-byte models," *Transactions of the Association for Computational Linguistics*, 2022, arXiv:2105.13626.

[10] P. Dhariwal, H. Jun, C. Payne, J. W. Kim, A. Radford, and I. Sutskever, "Jukebox: A generative model for music," 2020, arXiv:2005.00341.

[11] J. Liu, C. Li, Y. Ren, F. Chen, and Z. Zhao, "DiffSinger: Singing voice synthesis via shallow diffusion mechanism," in *AAAI Conference on Artificial Intelligence*, 2022, arXiv:2105.02446.

[12] D. Stoller, S. Durand, and S. Ewert, "End-to-end lyrics alignment for polyphonic music using an audio-to-character recognition model," in *IEEE International Conference on Acoustics, Speech and Signal Processing*, 2019, arXiv:1902.06797.

[13] S. Durand, D. Stoller, and S. Ewert, "Similarity-based audio-lyrics alignment of multiple languages," in *IEEE International Conference on Acoustics, Speech and Signal Processing*, 2023, arXiv:2306.07744.

[14] N. Zeghidour, A. Luebs, A. Omran, J. Skoglund, and M. Tagliasacchi, "SoundStream: An end-to-end neural audio codec," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2021, arXiv:2107.03312.

[15] A. Défossez, J. Copet, G. Synnaeve, and Y. Adi, "High fidelity neural audio compression," *Transactions on Machine Learning Research*, 2023, arXiv:2210.13438.

[16] R. Kumar, P. Seetharaman, A. Luebs, I. Kumar, and K. Kumar, "High-fidelity audio compression with improved RVQGAN," in *Advances in Neural Information Processing Systems*, 2023, arXiv:2306.06546.

[17] J. Kong, J. Kim, and J. Bae, "HiFi-GAN: Generative adversarial networks for efficient and high fidelity speech synthesis," in *Advances in Neural Information Processing Systems*, 2020, arXiv:2010.05646.

[18] H. Siuzdak, "Vocos: Closing the gap between time-domain and Fourier-based neural vocoders for high-quality audio synthesis," 2023, arXiv:2306.00814.

[19] D. W. Griffin and J. S. Lim, "Signal estimation from modified short-time Fourier transform," *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 32, no. 2, pp. 236–243, 1984.

[20] N. Perraudin, P. Balazs, and P. L. Søndergaard, "A fast Griffin-Lim algorithm," in *IEEE Workshop on Applications of Signal Processing to Audio and Acoustics*, 2013.

[21] J. O. Smith, "Digital audio resampling home page," Center for Computer Research in Music and Acoustics, Stanford University, 2002, https://ccrma.stanford.edu/~jos/resample/.

[22] M. Slaney, "Auditory toolbox, version 2," Interval Research Corporation, Tech. Rep. 1998-010, 1998.

[23] Z. Liu, H. Mao, C.-Y. Wu, C. Feichtenhofer, T. Darrell, and S. Xie, "A ConvNet for the 2020s," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, arXiv:2201.03545.

[24] B. Zhang and R. Sennrich, "Root mean square layer normalization," in *Advances in Neural Information Processing Systems*, 2019, arXiv:1910.07467.

[25] R. Yamamoto, E. Song, and J.-M. Kim, "Parallel WaveGAN: A fast waveform generation model based on generative adversarial networks with multi-resolution spectrogram," in *IEEE International Conference on Acoustics, Speech and Signal Processing*, 2020, arXiv:1910.11480.

[26] M. Defferrard, K. Benzi, P. Vandergheynst, and X. Bresson, "FMA: A dataset for music analysis," in *Proceedings of the International Society for Music Information Retrieval Conference*, 2017, arXiv:1612.01840.

[27] I. Loshchilov and F. Hutter, "Decoupled weight decay regularization," in *International Conference on Learning Representations*, 2019, arXiv:1711.05101.

[28] S. P. Lloyd, "Least squares quantization in PCM," *IEEE Transactions on Information Theory*, vol. 28, no. 2, pp. 129–137, 1982.

[29] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is all you need," in *Advances in Neural Information Processing Systems*, 2017, arXiv:1706.03762.

[30] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever, "Language models are unsupervised multitask learners," OpenAI, Tech. Rep., 2019.

[31] R. Xiong, Y. Yang, D. He, K. Zheng, S. Zheng, C. Xing, H. Zhang, Y. Lan, L. Wang, and T.-Y. Liu, "On layer normalization in the transformer architecture," in *International Conference on Machine Learning*, 2020, arXiv:2002.04745.

[32] D. Hendrycks and K. Gimpel, "Gaussian error linear units (GELUs)," 2016, arXiv:1606.08415.

[33] R. Pope *et al.*, "Efficiently scaling transformer inference," in *Conference on Machine Learning and Systems*, 2023, arXiv:2211.05102.

[34] D. B. Kirk, W. mei W. Hwu, and I. E. Hajj, *Programming Massively Parallel Processors*, 4th ed. Morgan Kaufmann, 2022.

[35] V. Volkov and J. W. Demmel, "Benchmarking GPUs to tune dense linear algebra," in *International Conference for High Performance Computing, Networking, Storage and Analysis (SC)*, 2008.

[36] NVIDIA, "Parallel thread execution ISA: warp-level matrix multiply-accumulate instructions," https://docs.nvidia.com/cuda/parallel-thread-execution/, accessed November 2026.

[37] I. Manco, B. Weck, S. Doh, M. Won, Y. Zhang, D. Bogdanov, Y. Wu, K. Chen, P. Tovstogan, E. Benetos, E. Quinton, G. Fazekas, and J. Nam, "The song describer dataset: a corpus of audio captions for music-and-language evaluation," in *NeurIPS Workshop on Machine Learning for Audio*, 2023, arXiv:2311.10057.

[38] D. Bogdanov, M. Won, P. Tovstogan, A. Porter, and X. Serra, "The MTG-Jamendo dataset for automatic music tagging," in *Machine Learning for Music Discovery Workshop, International Conference on Machine Learning (ICML)*, 2019.

[39] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, and I. Sutskever, "Robust speech recognition via large-scale weak supervision," in *Proceedings of the 40th International Conference on Machine Learning (ICML)*, 2023, arXiv:2212.04356.

[40] "LRCLIB: a free and open database of time-synchronized lyrics," https://lrclib.net, accessed November 2026.

[41] A. Holtzman, J. Buys, L. Du, M. Forbes, and Y. Choi, "The curious case of neural text degeneration," in *International Conference on Learning Representations (ICLR)*, 2020.

[42] N. S. Keskar, B. McCann, L. R. Varshney, C. Xiong, and R. Socher, "CTRL: A conditional transformer language model for controllable generation," *arXiv preprint arXiv:1909.05858*, 2019.

[43] T. Dao, D. Y. Fu, S. Ermon, A. Rudra, and C. Ré, "FlashAttention: Fast and memory-efficient exact attention with IO-awareness," in *Advances in Neural Information Processing Systems*, 2022, arXiv:2205.14135.

Appendix

Both devices were shared with other work during our experiments. In particular, language-model services occupied most of the Thor's memory until the larger training run began, at which point they were stopped.

TABLE XI

THE TWO DEVICES. CORE COUNTS AND MEMORY BANDWIDTH ARE THE MANUFACTURER'S SPECIFICATIONS; MEMORY CAPACITY, COMPUTE CAPABILITY AND SOFTWARE VERSIONS WERE READ FROM THE DEVICES.

	Jetson Orin NX 16 GB	Jetson AGX Thor
GPU	NVIDIA Ampere, 1 024 CUDA cores, 32 tensor cores	NVIDIA Blackwell, 2 560 CUDA cores, 96 tensor cores
compute capability	8.7	11.0
CPU	8-core Arm Cortex-A78AE	14-core Arm Neoverse-V3AE
memory	16 GB LPDDR5, shared by CPU and GPU	128 GB LPDDR5X, shared by CPU and GPU
memory bandwidth	102 GB/s	273 GB/s
system software	L4T R36.4.3, CUDA 12.6	L4T R39.2.1, CUDA 13.2
Rust toolchain	nightly-2026-04-03	nightly-2026-10-11
cuda-oxide	revision b7fe543	revision e027ac3

All figures in this appendix were measured on the Orin NX with `staleynet bench`. Each timing is the mean of five runs after one warm-up run, and each table entry is the median of three such measurements, because the clock frequency of the device varies noticeably from run to run.

On the Thor, measured during training runs of identical shape, register blocking reduced a training step of the first model on 4×768 positions from 238 ms to 147 ms, and a step of the larger model on $8 \times 1\,408$ positions takes about 2.0 seconds.

TABLE XII
MATRIX PRODUCTS AT THE SIZES USED BY THE FIRST MODEL, IN GFLOP/S.

product ($M \times N \times K$)	direct	tiled	register-blocked	blocked / tiled
attention projections ($2048 \times 768 \times 256$)	46.8	258.6	579.0	2.2
feed-forward ($2048 \times 1024 \times 256$)	55.3	255.5	450.6	1.8
output heads ($2048 \times 4096 \times 256$)	31.2	222.1	458.5	2.1
spectrogram ($4096 \times 513 \times 1024$)	47.7	236.1	541.7	2.3

TABLE XIII
ONE TRAINING STEP OF THE FIRST MODEL ON 4×512 POSITIONS, FORWARD AND BACKWARD.

matrix-product kernel	time per step (ms)
direct	2 930
tiled	576
register-blocked	315

TABLE XIV
OTHER MEASUREMENTS ON THE ORIN NX.

measurement	result
log-mel spectrogram of 60 s, GPU	47 ms
log-mel spectrogram of 60 s, CPU (rustfft, 8 threads)	73 ms
decoding step, key/value cache	6.2 ms
decoding step, recomputing the context	17.1 ms

Table XV lists the mean reconstruction error over all 39 held-out songs for the tokenizers we compared, each trained on the same training songs with 1 024 prototypes per codebook. The columns give the number of frames per step, the number of band groups, the number of residual levels in each group, and the resulting number of codes per step.

TABLE XV
HELD-OUT RECONSTRUCTION ERROR OF DIFFERENT TOKENIZERS, IN LOG UNITS PER MEL BAND (ONE LOG UNIT IS A FACTOR OF e IN ENERGY, ABOUT 4.3 DB). A FRAME COVERS 10.7 MS OF AUDIO; EVERY CODEBOOK HAS 1 024 PROTOTYPES.

frames	groups	levels	codes	error (log units per band)
2	1	4	4	0.776
2	1	8	8	0.643
1	1	4	4	0.745
1	1	8	8	0.588
1	4	2	8	0.597
1	8	1	8	0.612
1	1	16	16	0.427
1	8	2	16	0.403
1	4	4	16	0.401

At 8 codes per step, dividing the bands into groups did not help. With 16 codes per step it helped a little: 16 levels without groups reached 0.427, and 4 groups of 4 levels reached 0.401. Most of the improvement over the first tokenizer therefore comes from describing each step with more codes, and a smaller part, about 6 %, from quantizing the band groups separately.